
ASSEMBLY INSTRUCTIONS

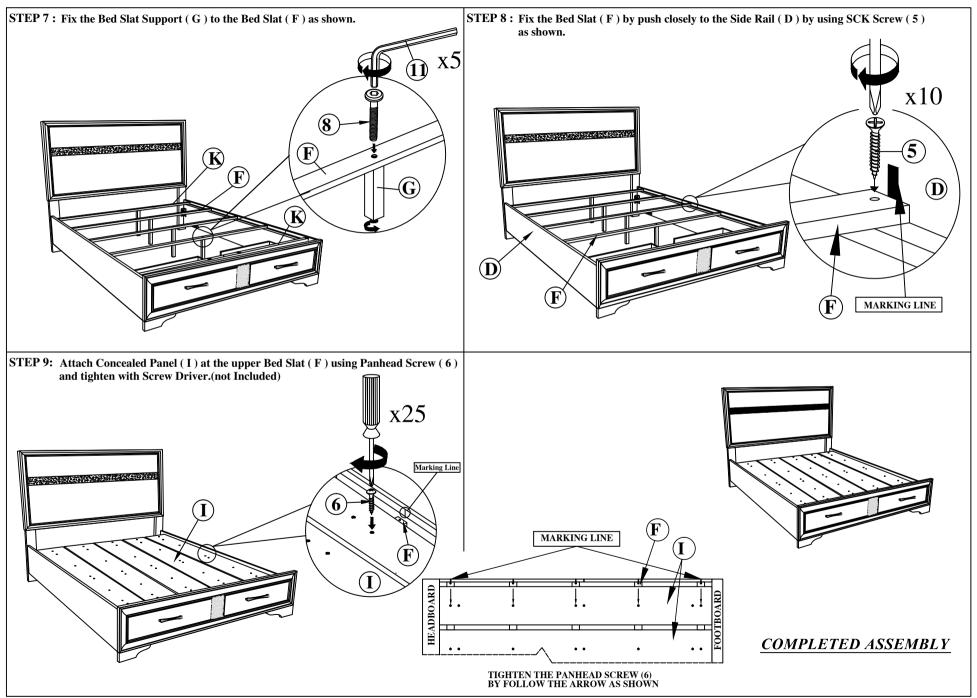

ASSEMBLY INSTRUCTIONS

MODEL: 0162A QUEEN STORAGE BED

(Box 1) BOX OF HEADBOARD & FOOTBOARD

No	ITEM	Qty
A	Headboard	1 pc
В	Footboard	1 pc
С	Headboard Leg (L/R)	2 pcs

(Box 2) BOX OF SIDE RAIL

No	ITEM	Qty
D	Side rail	2 pcs
E	Center slat drawer	1 pc
F	Bed slat	3 pcs
G	Bed slat support	5 pcs
Н	Drawer slat support	1 pc
Ι	Concealed panel	5 pcs
J	Drawer support rail	2 pcs
K	Bed slat with marking	2 pcs

(Box 1) HARDWARE LIST (HEADBOARD)

No	ITEM	Qty
1	JCBC M6 x 30mm	6 pcs
2	SPRING WASHER 1/4" Rbw	6 pcs
3	Flat Washer 1/4"ID x 13mmOD	6 pcs
4	ALLEN KEY m4x65mm Blk	1 pc

(Box 2) HARDWARE LIST (SIDE RAIL)


HARDWARE LIST (SIDE RAIL)			
No	ITEM	Qty	
5	CSK M4 x 32mm	14	
	D	pcs	
6	Pan Head Screw M3.5 x 20 blk	25	
	Omm.	pcs	
7	JCBC M6 x 35mm	2 ncc	
		2 pcs	
8	JCBC M6 x 50mm	6 pcs	
		o pes	
9	SPRING WASHER 1/4" Rbw	2 pcs	
		2 pcs	
10	Flat Washer 1/4"ID x 13mmOD Blk	2 pcs	
		2 pcs	
11	ALLEN KEY m4x65mm Blk	1 pc	
		1 pc	
12	ALLEN KEY m5x65mm Blk	1 nc	
12		1 pc	

(Box 3) BOX OF DRAWER

No	ITEM	Qty
L	Drawer	2 pcs

STEP 1: Attach Head Board Leg (C) to Head Board (A) as shown using JCBC BOLT (1) with Spring Washer (2), Flat washer (3) and securing with ALLEN KEY (4). WARNING! USE SHORT BOLT LEFT M6 x 30mm RIGHT

STEP 2: Loosen the JCBB Bolt from Headboard (A) and Footboard (B) using ALLEN KEY (12). Attach the Side Rail (D) to Headboard (A) and Footboard (B) by pushing the bracket down to fit it. Tighten the JCBB Bolt by ALLEN KEY (12).

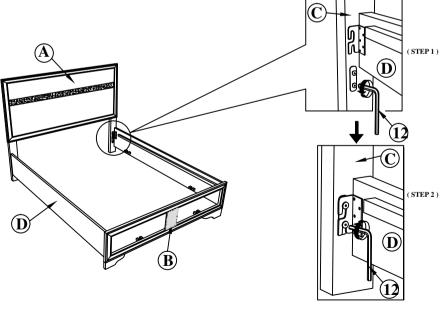

ASSEMBLY INSTRUCTIONS

STEP 3: Attach the Center Slat Drawer (E) to Side Rail (D) as shown using STEP 4: Attach the Support Slat Drawer (H) to Center Slat Drawer (E) as shown using CSK Screw (5) and tighten with Screw Driver.(Not Included) JCBC Bolt (8) and tighten with ALLEN KEY (11). (\mathbf{D}) (\mathbf{D}) STEP 6.1: Insert the Drawer (L) at the Drawer Support Rail (J). STEP 5.1: Attach the Drawer Support Rail (J) as shown using CSK Screw (5) and tighten with Screw Driver.(Not Included) STEP 6.2: Remove HANDLE and using a Philips head screw driver as shown STEP 5.2: Using JCBC Bolt (7) with Spring Washer (9), Flat Washer (10) and securing with ALLEN KEY (11). PARTICIPATION OF THE PARTICIPA STEP - A STEP - B