


***** INSTALLATION INSTRUCTIONS *****

ASSEMBLY: ITEM NO. 40130

- STEP1. TAKE OUT LAMP PARTS FROM THE PACKAGE SLOWLY, PLACE THEM ON SMOOTH AND LEVEL SURFACE.
- STEP2. REMOVE THE PROTECTIVE SPONGE ON THE G9 LED BULB
- STEP3. REMOVE THE PLASTIC PROTECTIVE SLEEVES FROM THE BUBBLE COLUMN.
- STEP4. INSERT THE BUBBLE COLUMN INTO THE COVER , HOLD THE COVER AND BUBBLE COLUMN WITH BOTH HANDS AT THE SAME TIME.
- STEP5. INSERT THE BUBBLE COLUMN AND THE COVER INTO THE BODY, RELEASE THE COVER SLOWLY , THEN ADJUST THE ANGLE OF THE COVER GENTLY UNTIL ALIGN.

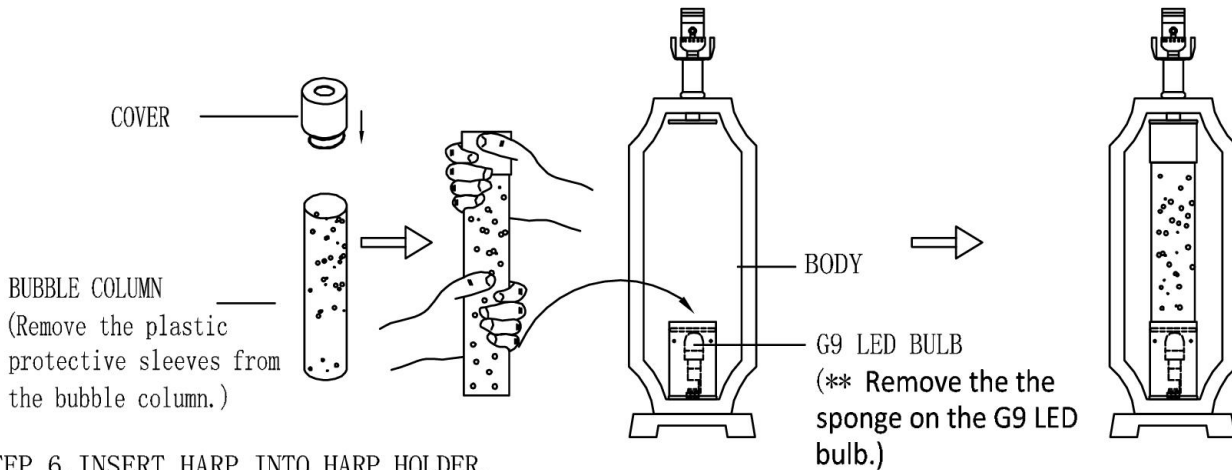

- STEP 6. INSERT HARP INTO HARP HOLDER.
- STEP 7. SLIDE DOWN CAPS (BOTH SIDES) TO JOINT HARP AND HOLDER BY TIGHT PRESS FIT.
- STEP 8. REMOVE THE PLASTIC DUST PROTECTOR FROM THE SHADE.
- STEP 9. PUT SHADE ONTO THE TOP OF THE HARP AND SCREW ON FINIAL TO SECURE THE SHADE.
- STEP 10. INSERT THE POLARIZED PLUG INTO AN OUTLET, TURN ON THE SWITCH AND ENJOY YOUR NEW LAMP.

IF THE G9 LED BULB IS BURNT OUT AND REQUIRES REPLACEMENT, PLEASE TURN OFF THE POWER AND WAIT UNTIL THE LAMP COOL DOWN ENTIRELY, THEN FOLLOWING THE STEPS.

1. AT THE SAME TIME HOLD THE COVER AND THE BUBBLE COLUMN WITH BOTH HANDS , COMPRESS THE COVER DOWN, THEN TAKE OUT THEM.
2. PULL OUT THE G9 LED BULB AND REPLACE A NEW ONE.
3. INSTALL THE BUBBLE COLUMN AND THE COVER BACK.

