









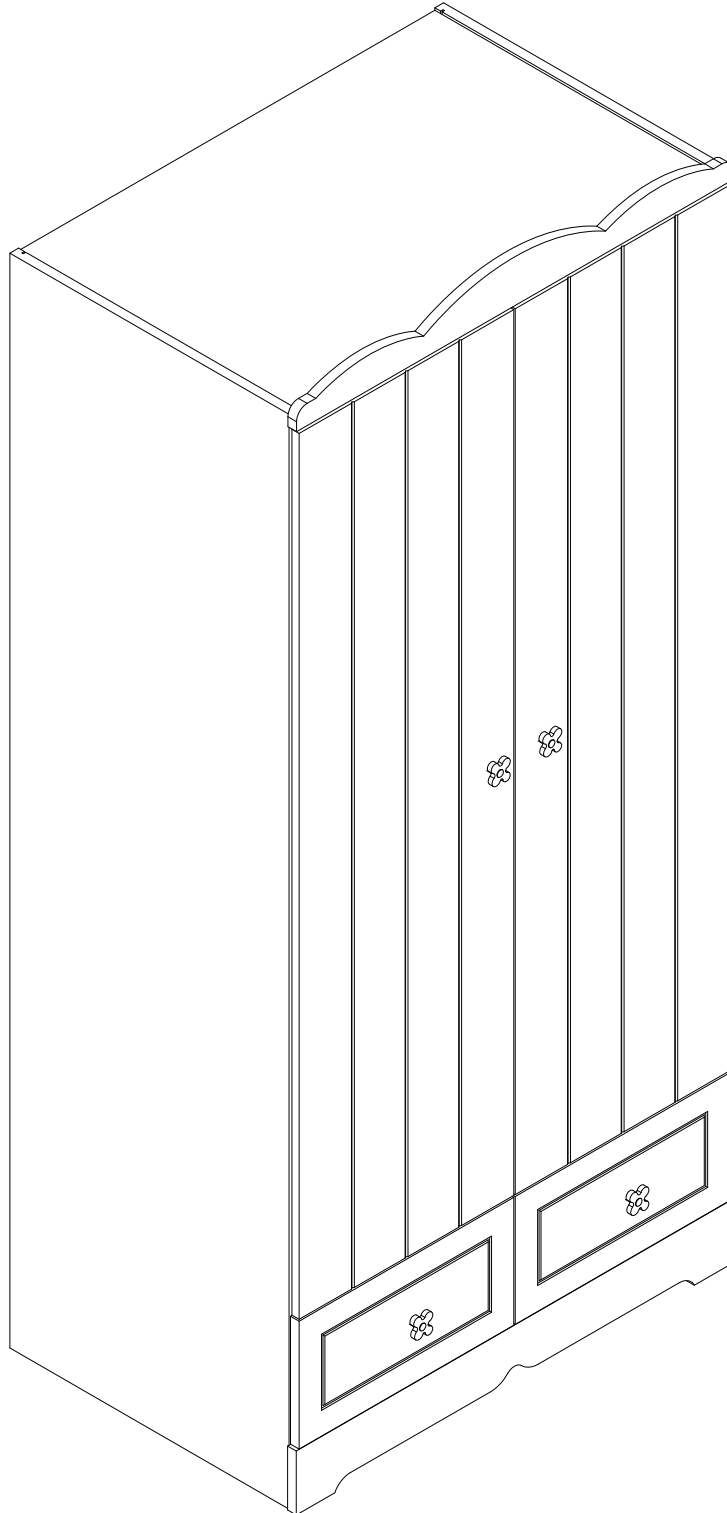






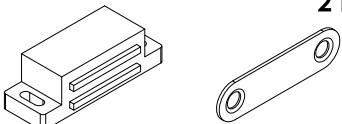
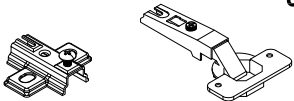





ASSEMBLY INSTRUCTION

MODEL : 38157 2 DOORS + 2 DRAWERS WARDROBE

ACME FURNITURE



HARDWARE LIST


<p>A 16 PCS</p>  <p>PLASTIC DOWEL (M6 x 30MM)</p>	<p>B 53 PCS</p>  <p>PLASTIC DOWEL (M8 x 30MM)</p>	<p>C 39 PCS</p>  <p>CONNECTING BOLT (24MM)</p>
<p>D 8 PCS</p>  <p>MINIFIX (9MM)</p>	<p>E 31 PCS</p>  <p>MINIFIX (12MM)</p>	<p>F 8 PCS</p>  <p>CSK C/B SCREW (M3 x 20MM)</p>
<p>G 40 PCS</p>  <p>CSK C/B SCREW (M3.5 x 16MM)</p>	<p>H 4 PCS</p>  <p>CSK C/B SCREW (M4 x 32MM)</p>	<p>J 4 PCS</p>  <p>P/H C/B SCREW (M3.5 x 16MM)</p>
<p>K 4 PCS</p>  <p>P/H RATTAN SCREW (#8 x 32MM)</p>	<p>L 4 PCS</p>  <p>P/H M SCREW (M4 x 20MM)</p>	<p>M 39 PCS</p>  <p>EURO NYLON</p>
<p>N 8 PCS</p>  <p>PLASTIC CORNER BLOCK (ABS)</p>	<p>P 1 PC</p>  <p>BASE GLIDE L190 (M6 x 23MM)</p>	<p>Q 2 PCS</p>  <p>MAGNET 3.5KG (WHITE)</p>
<p>R 6 PCS</p>  <p>CONCEALED HINGES C93-0 (5/8"MM) PLATE H2</p>	<p>S 2 PCS</p>  <p>NICKEL OVAL PIPE HOLDER</p>	<p>T 1 PC</p>  <p>ALUMINIUM OVAL TUBE (30 x 15 x 855MM)</p>
<p>U 4 PCS</p>  <p>DRAWER SLIDE 400MM (16") - BOTTOM L&R</p>	<p>V 4 PCS</p>  <p>HANDLE 8121</p>	<p>W 1 PC</p>  <p>SUPPORT RAIL</p>




Do not recommend the use of power drills/drivers for inserting bolts/screws as this could damage the unit.

Tools Required :
Crosshead Screw Driver


PART LIST

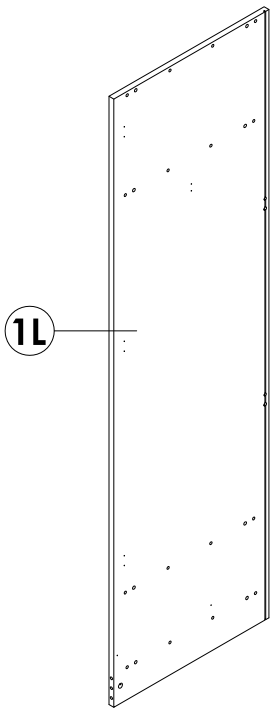


SIDE PANEL (LEFT)
(1 PC / SET)
CARTON 1 OF 2

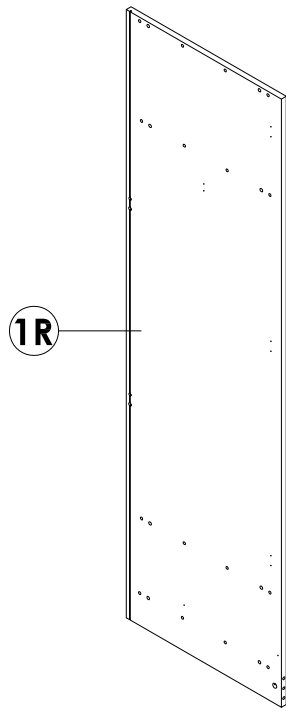


SIDE PANEL (RIGHT)
(1 PC / SET)
CARTON 1 OF 2

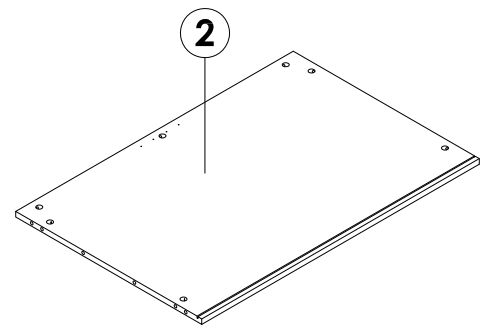


TOP PANEL
(1 PC / SET)
CARTON 2 OF 2

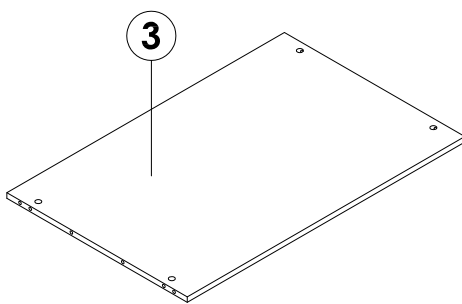


TOP SHELF
(1 PC / SET)
CARTON 2 OF 2

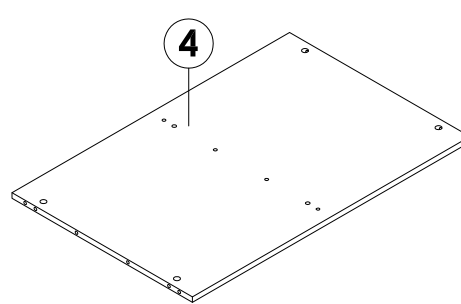


BOTTOM SHELF
(1 PC / SET)
CARTON 2 OF 2




VERTICAL PANEL
(1 PC / SET)
CARTON 2 OF 2

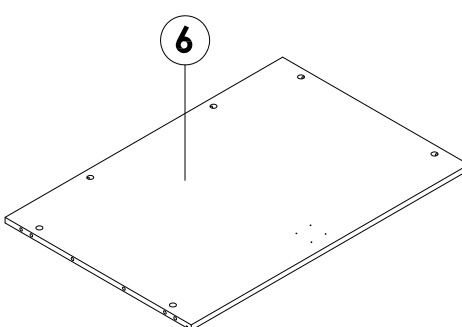

BASE PANEL
(1 PC / SET)
CARTON 2 OF 2




TOP RAIL (FRONT)
(1 PC / SET)
CARTON 1 OF 2




BOTTOM RAIL (FRONT)
(1 PC / SET)
CARTON 1 OF 2


PART LIST




CENTER RAIL (REAR)
(2 PCS / SET)
CARTON 2 OF 2

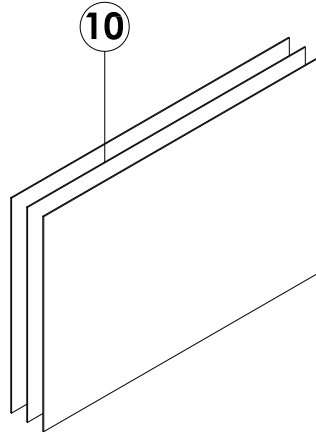


BACK PANEL
(3 PCS / SET)
CARTON 2 OF 2

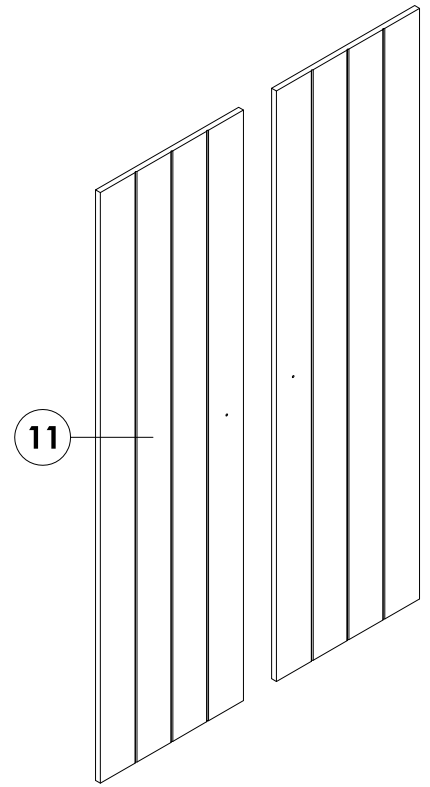


DOOR
(2 PCS / SET)
CARTON 1 OF 2




DRAWER FACE
(2 PCS / SET)
CARTON 2 OF 2

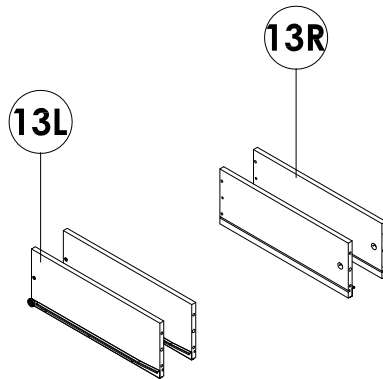


DRAWER SIDE (L/R)
(4 PCS / SET)
CARTON 2 OF 2





DRAWER REAR
(2 PCS / SET)
CARTON 2 OF 2



DRAWER BASE
(2 PCS / SET)
CARTON 2 OF 2




DRAWER SUPPORT BASE
(2 PCS / SET)
CARTON 2 OF 2

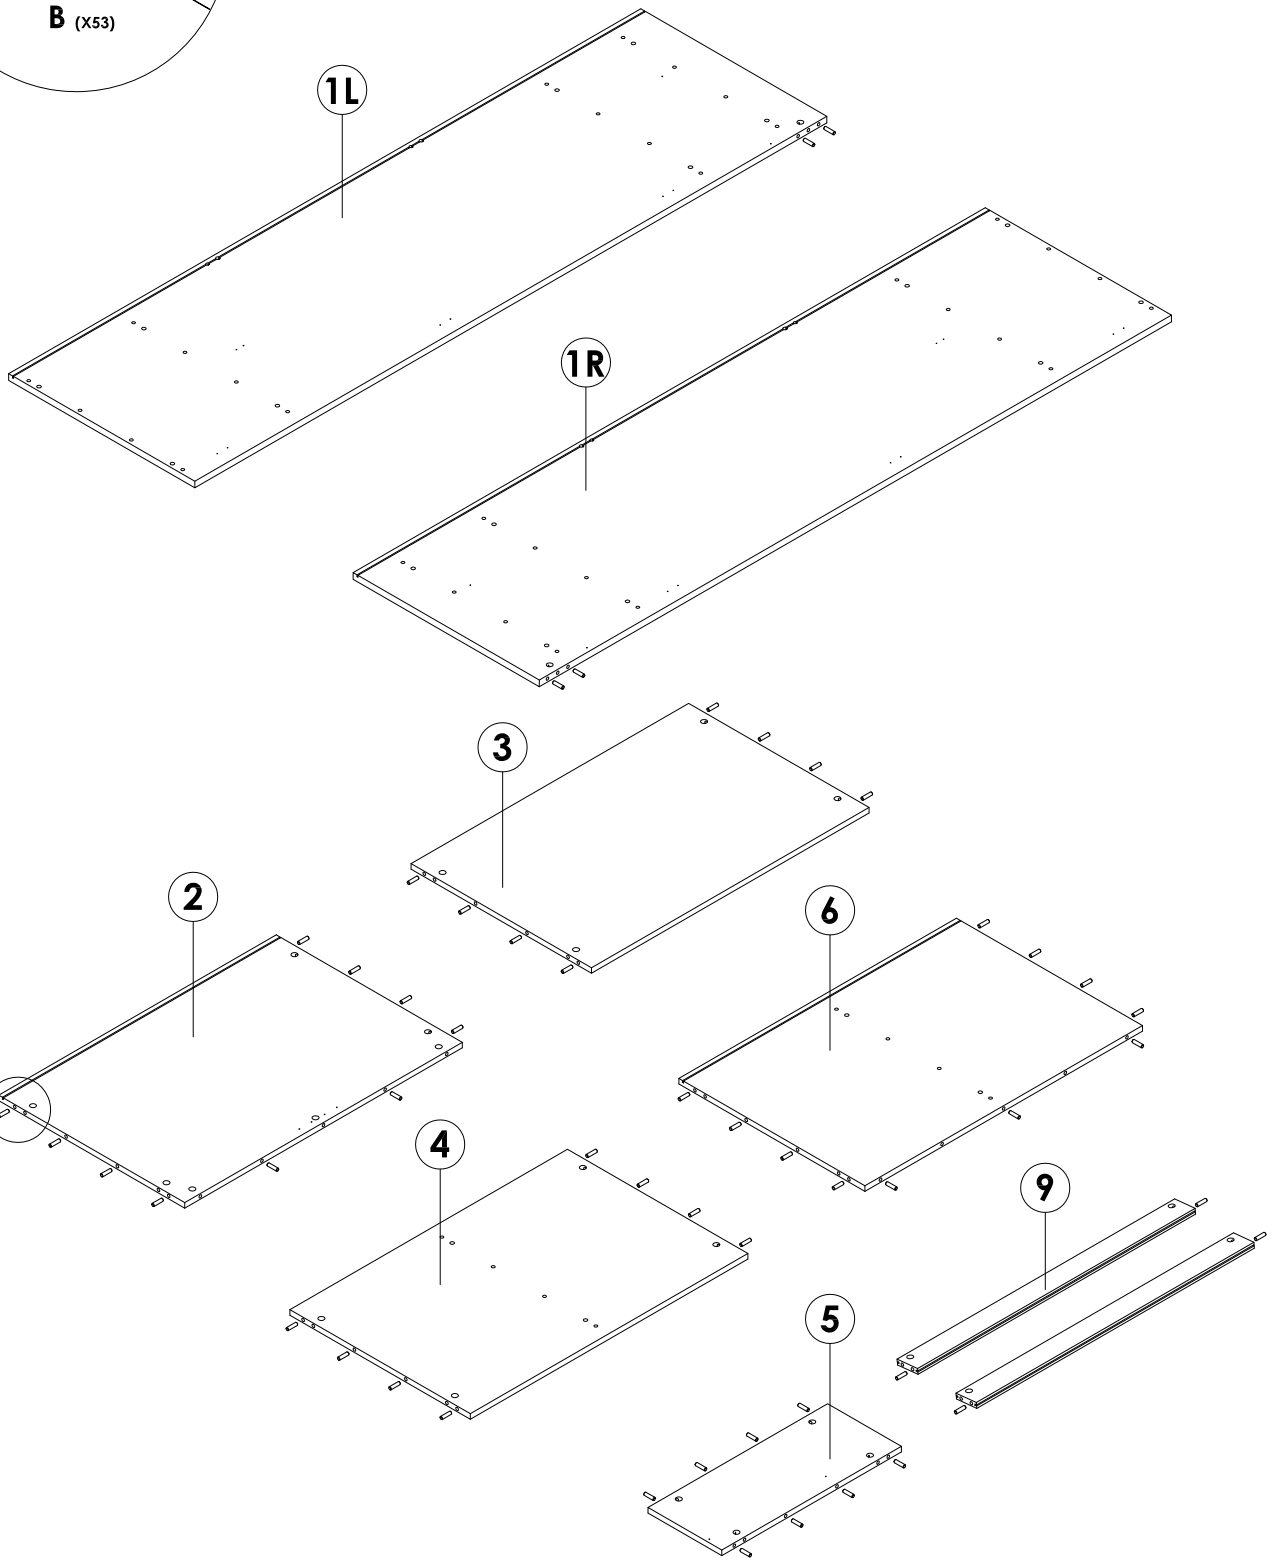


STEP 1

Insert **(B)** into Ø8MM holes on **Side Panel (L/R), Top Panel, Top Shelf, Bottom Shelf, Vertical Panel, Base Panel and Center Rail (Rear).**

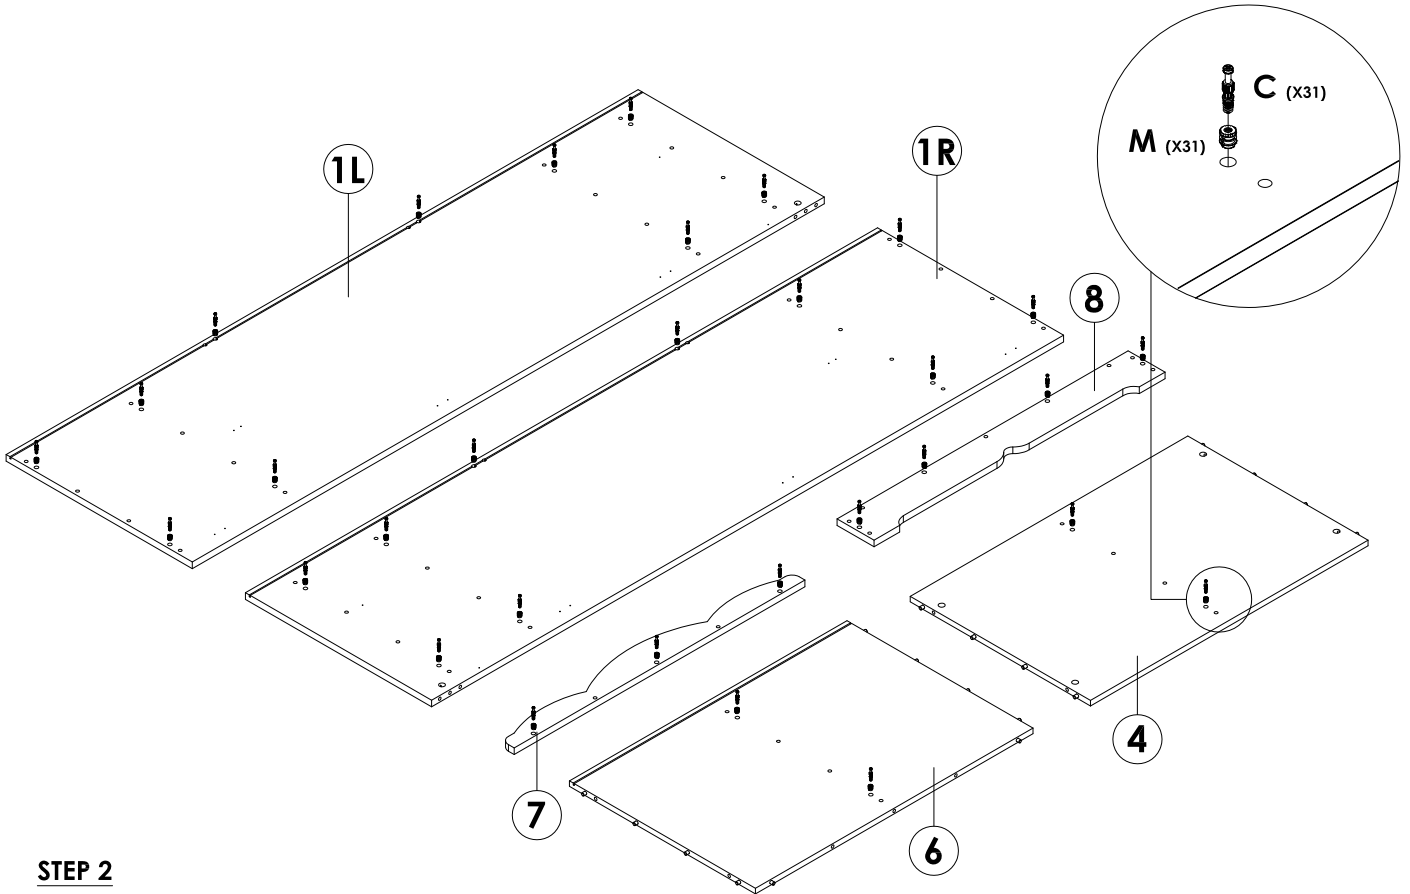


STEP 2

Insert **(M)** and **(C)** into Ø10MM holes on **Side Panel (L/R), Top Rail (Front), Bottom Shelf, Base Panel and Bottom Rail (Front)** tighten it up by using Crosshead Screw Driver.

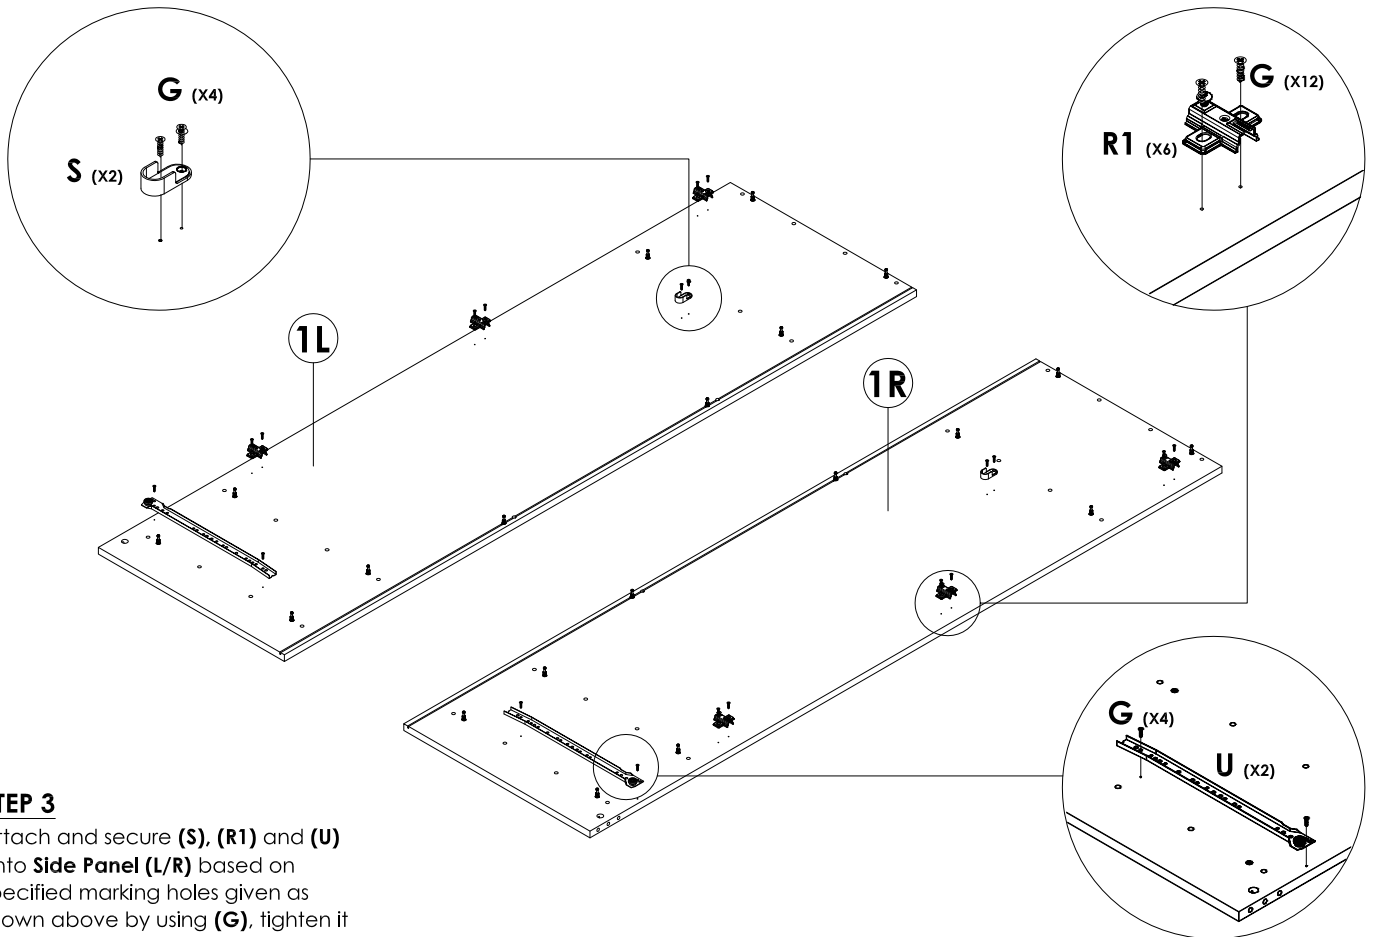

STEP 3


Attach and secure **(S)**, **(R1)** and **(U)** onto **Side Panel (L/R)** based on specified marking holes given as shown above by using **(G)**, tighten it up by using Crosshead Screw Driver.

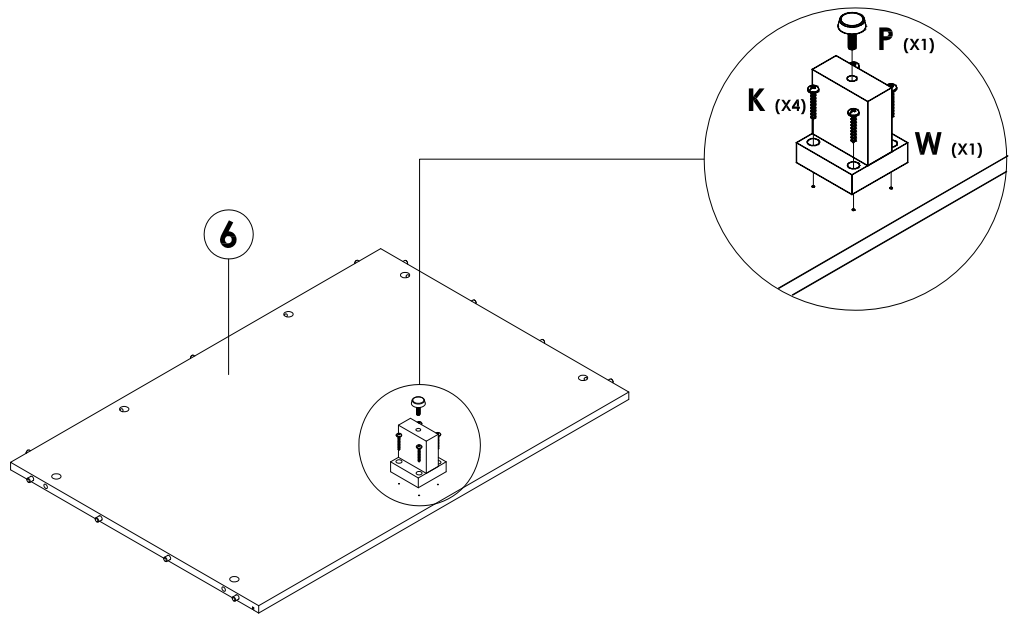

STEP 4


Attach and secure **(W)** onto **Base Panel** by using **(K)**, tighten it up by using Crosshead Screw Driver.

Follow that up by Inserting **(P)** into **(W)**, adjust it when floor uneven.

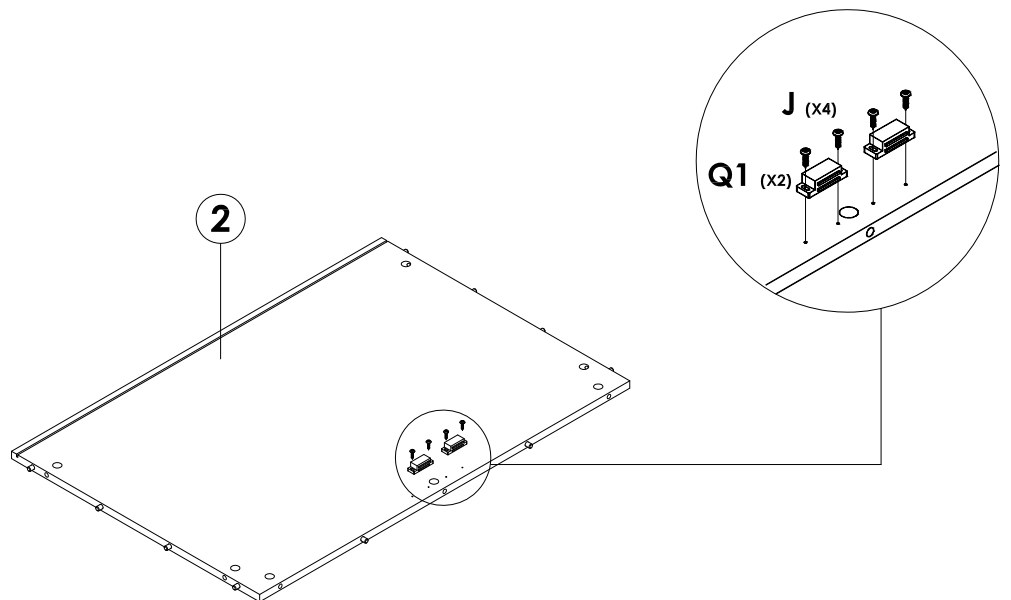


STEP 5

Attach and secure **(Q1)** onto **Top Panel** by using **(J)**, tighten it up by using Crosshead Screw Driver.

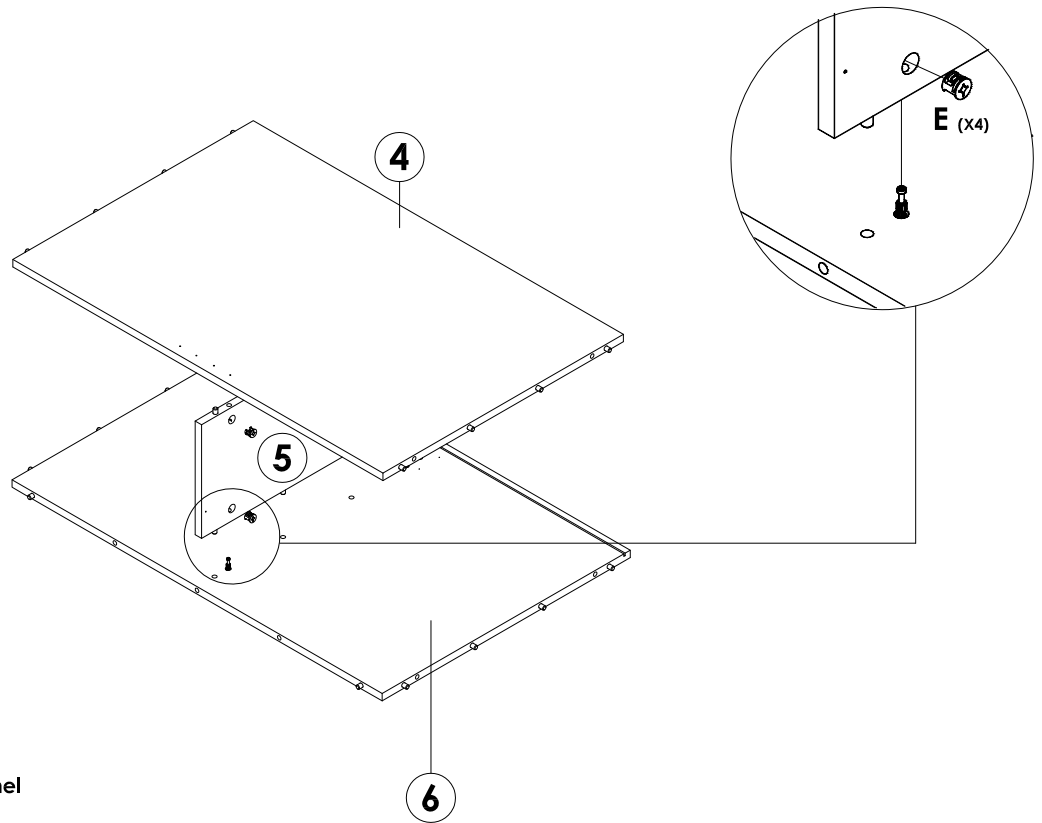


STEP 6

Attach and secure **Vertical Panel** onto **Base Panel and Bottom Shelf** by using **(E)**, tighten it up by using Crosshead Screw Driver.

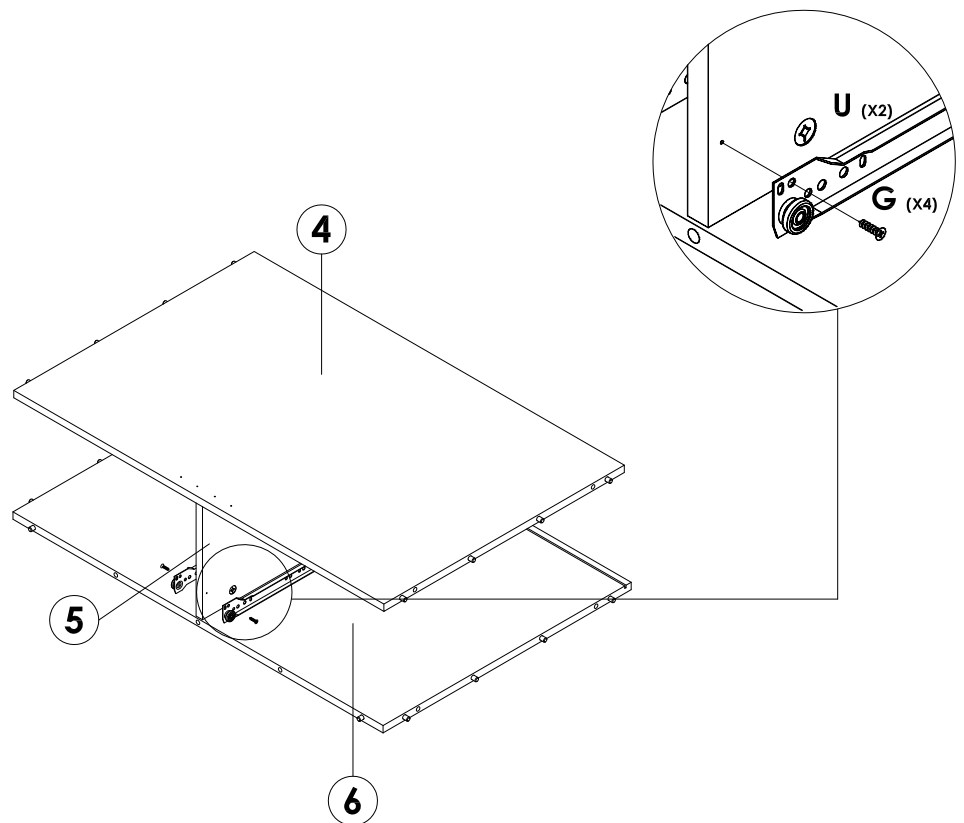


STEP 7

Attach and secure **(U)** onto **Vertical Panel** by using **(G)**, tighten it up by using Crosshead Screw Driver.

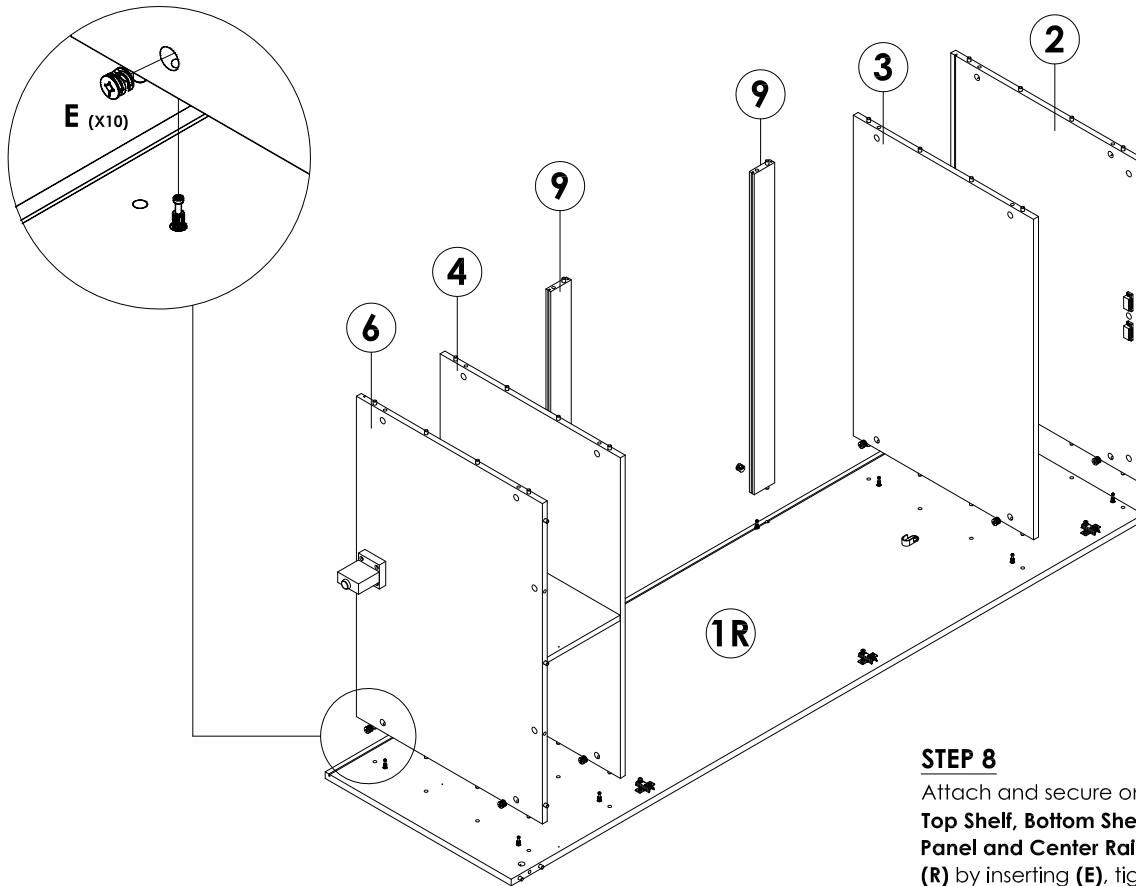


STEP 8

Attach and secure one side of **Top Panel**, **Top Shelf**, **Bottom Shelf**, **Vertical Panel**, **Base Panel** and **Center Rail (Rear)** onto **Side Panel (R)** by inserting **(E)**, tighten it up by using **Crosshead Screw Driver**.

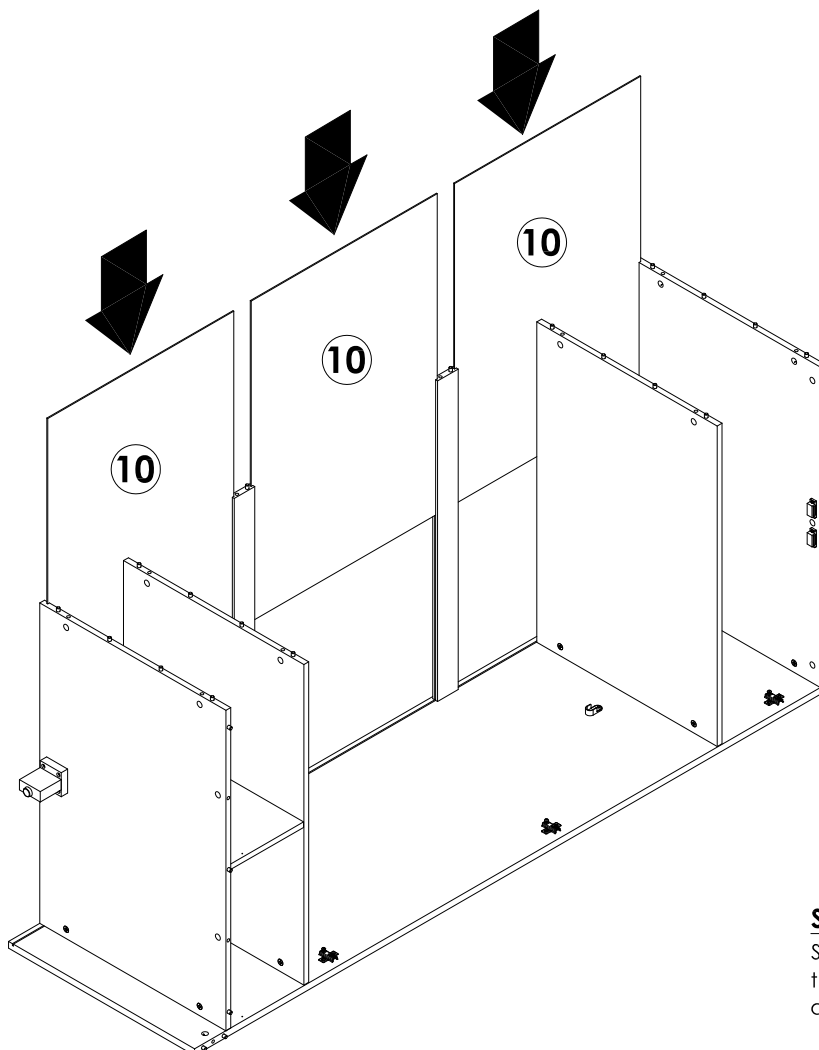


STEP 9

Slide down 3 pieces of **Back Panel** through the groove as shown on drawing.

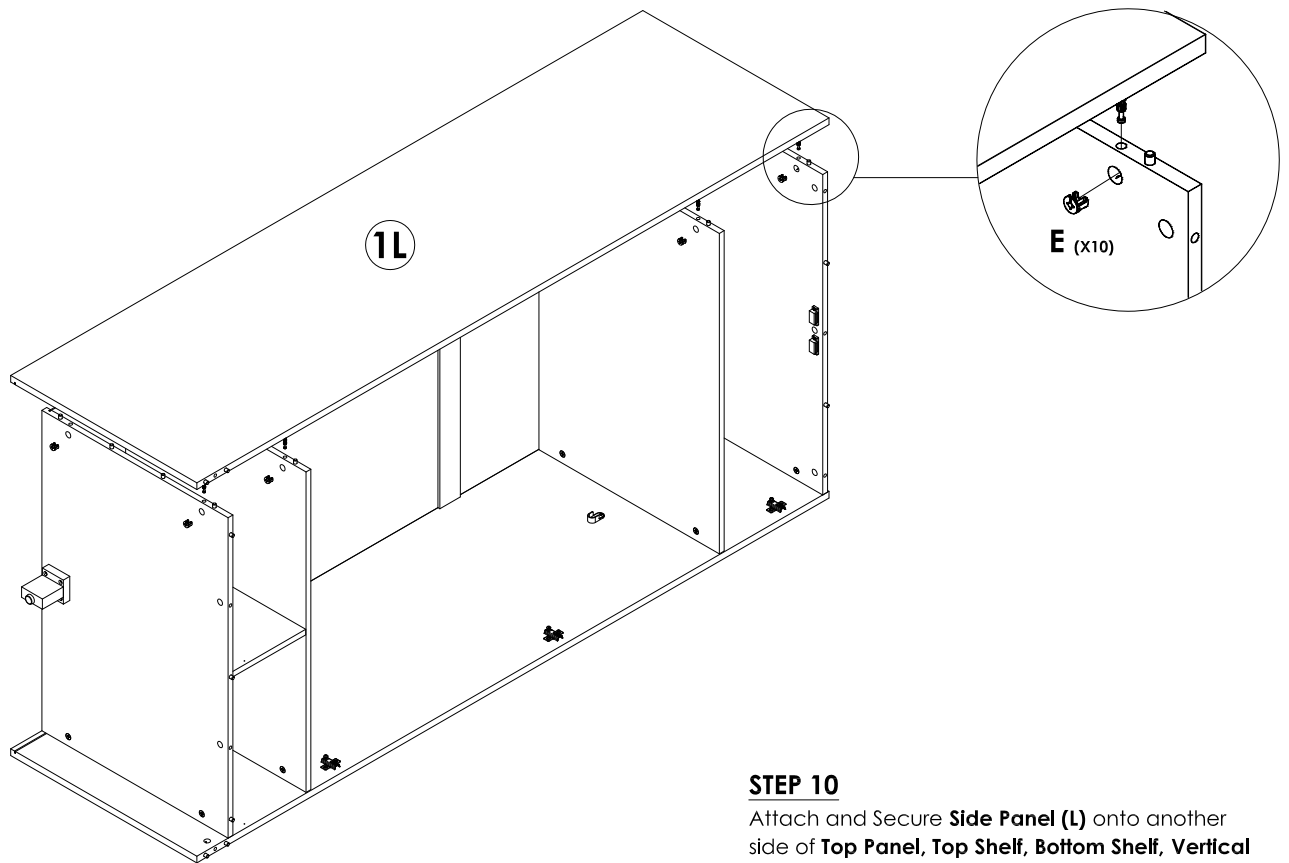

STEP 10

Attach and Secure **Side Panel (L)** onto another side of **Top Panel, Top Shelf, Bottom Shelf, Vertical Panel, Base Panel and Center Rail (Rear)** by inserting **(E)**, tighten it up by using Crosshead Screw Driver.

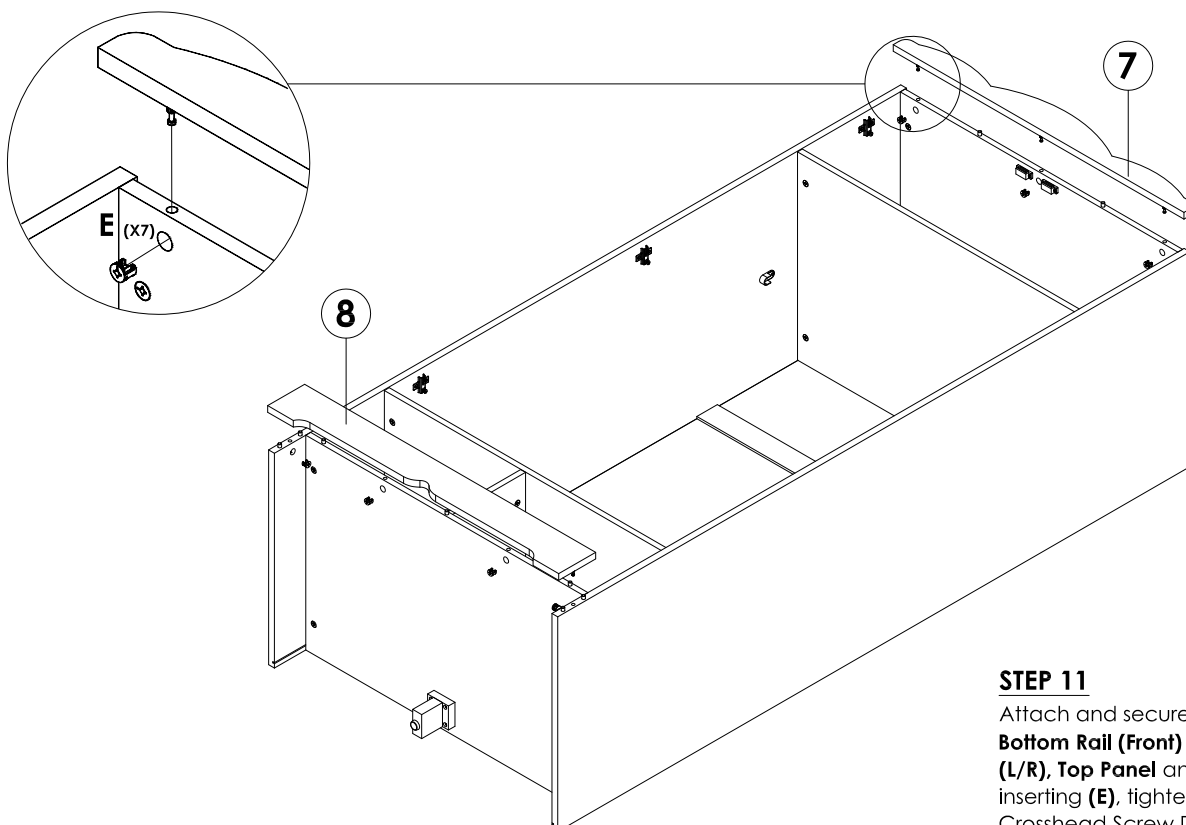


STEP 11

Attach and secure **Top Rail (Front) and Bottom Rail (Front)** onto both **Side Panel (L/R), Top Panel and Base Panel** by inserting **(E)**, tighten it up by using Crosshead Screw Driver.




STEP 12

Attach and secure **(N)** on sides pointed by arrows on the drawing as shown by using **(F)**, tighten it up by using Crosshead Screw Driver.

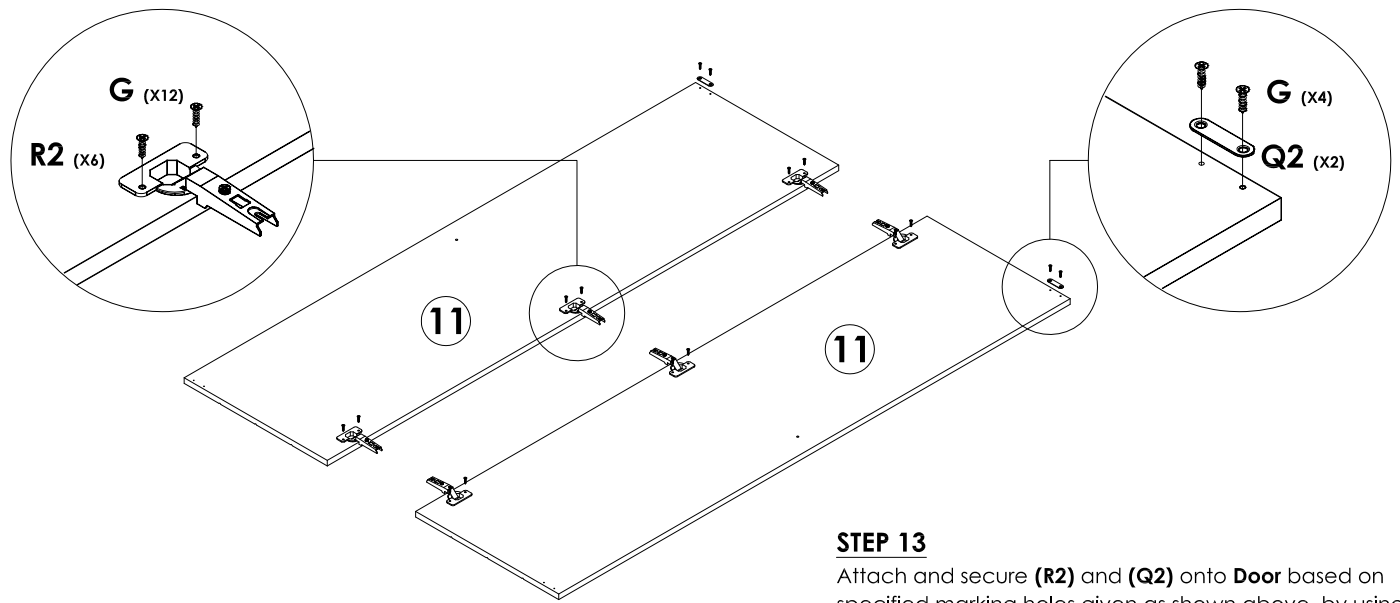

STEP 13


Attach and secure **(R2)** and **(Q2)** onto **Door** based on specified marking holes given as shown above by using **(G)**, tighten it up by using Crosshead Screw Driver.

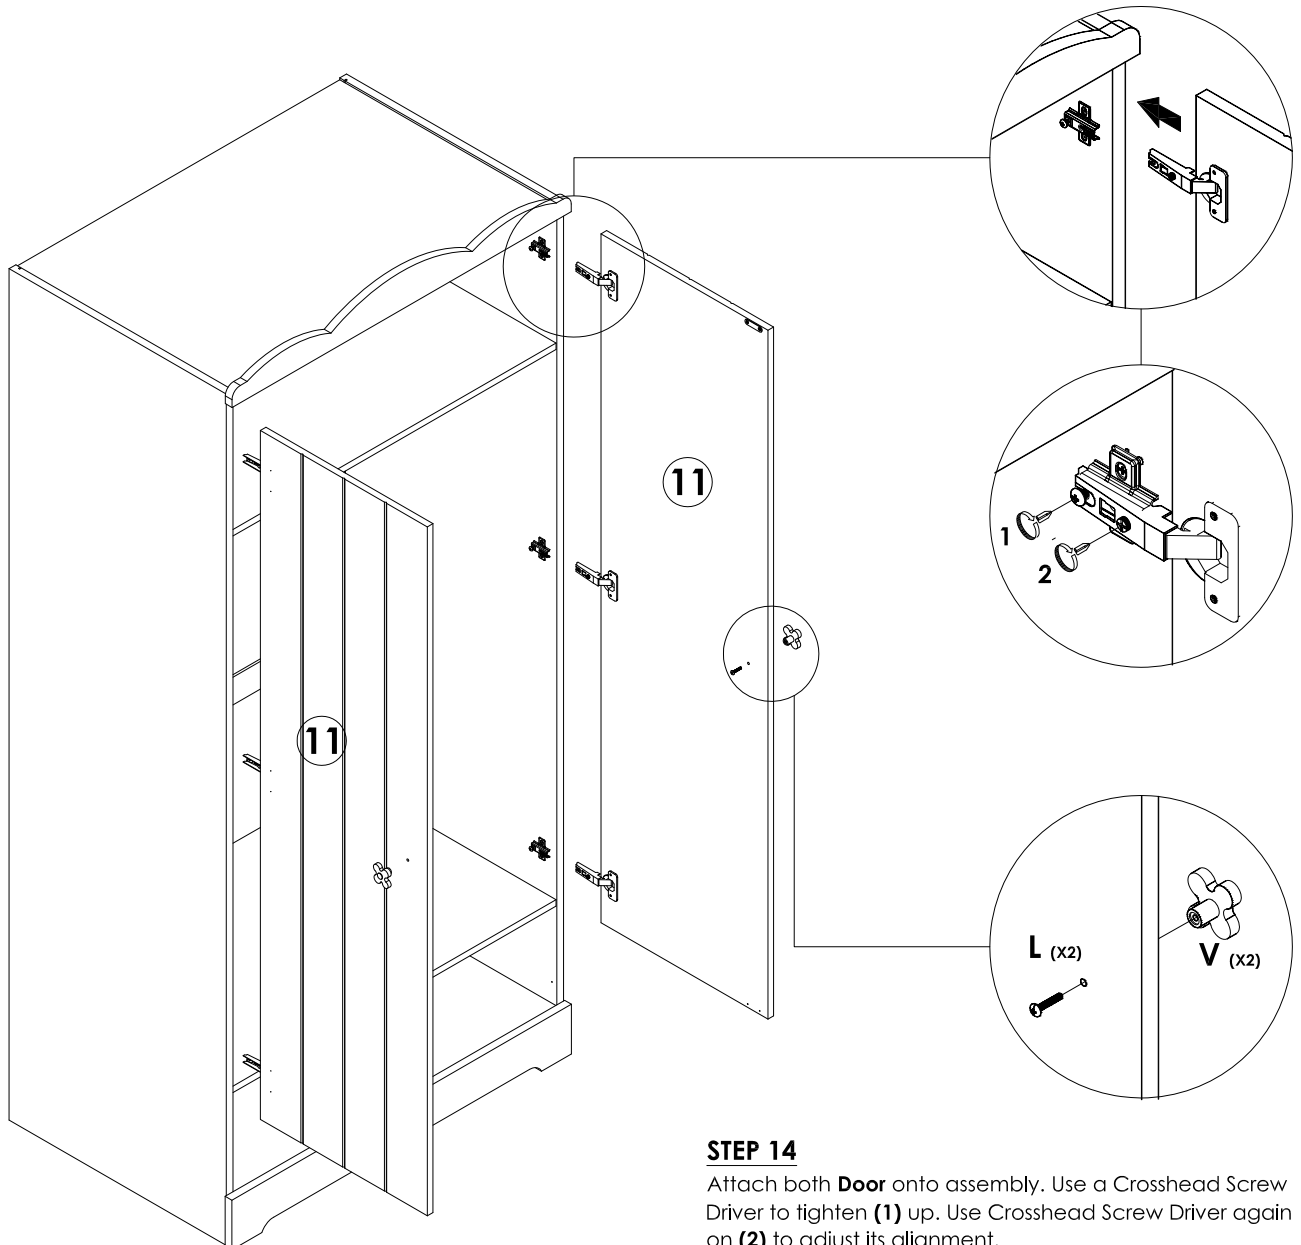

STEP 14


Attach both **Door** onto assembly. Use a Crosshead Screw Driver to tighten **(1)** up. Use Crosshead Screw Driver again on **(2)** to adjust its alignment.

Attach and secure **(V)** onto **Door** by using **(L)**, tighten it up by using Crosshead Screw Driver.

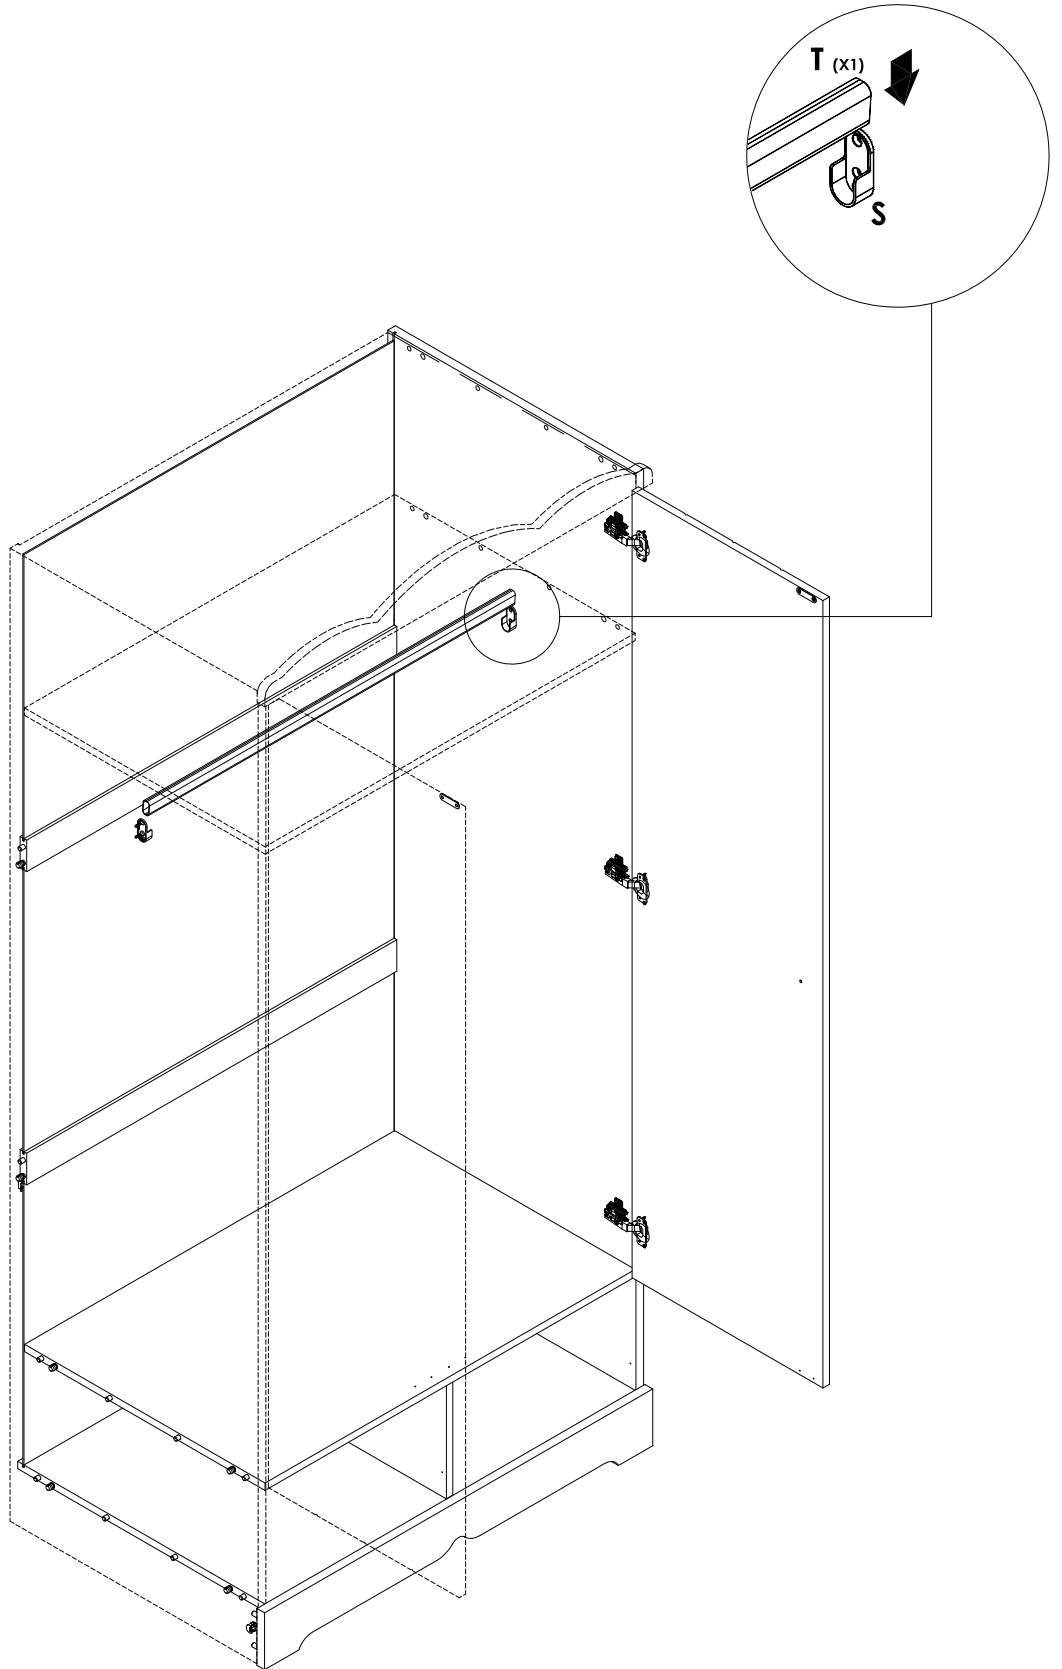


STEP 15

Go on to Slot **(T)** into **(S)**.

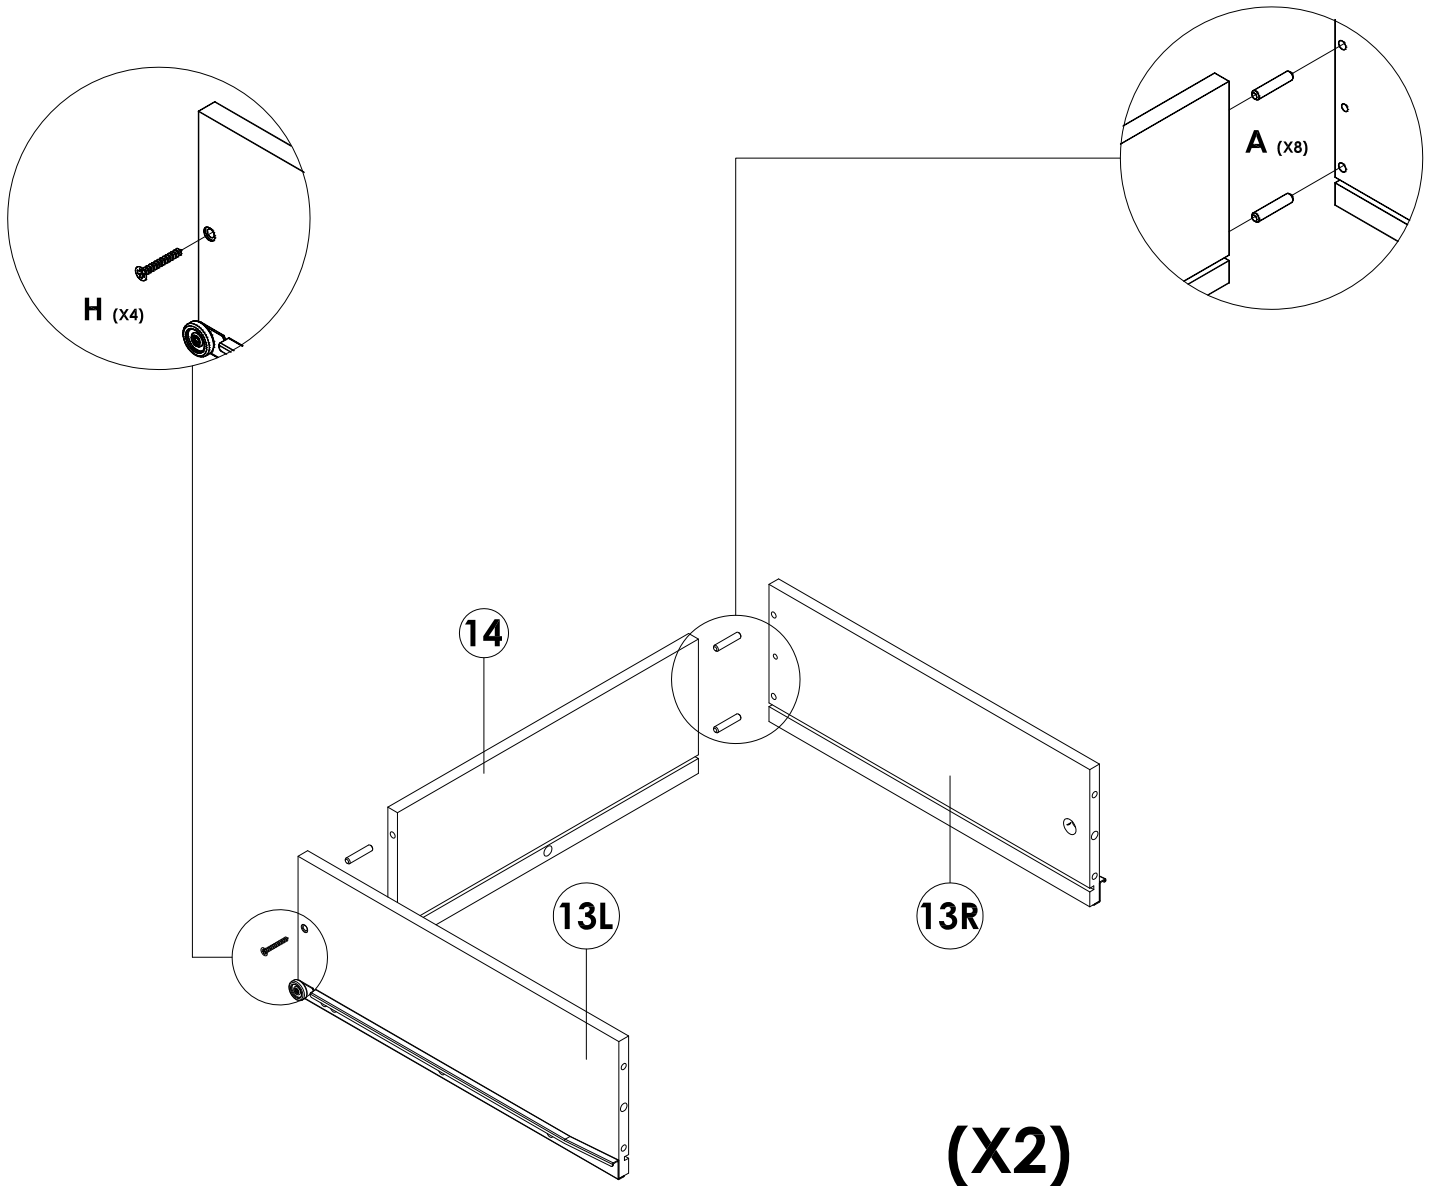


STEP 16

Attach **Drawer Side (L/R)** onto **Drawer Rear** by using **(A)** and **(H)**, tighten it up by using crosshead screw driver.

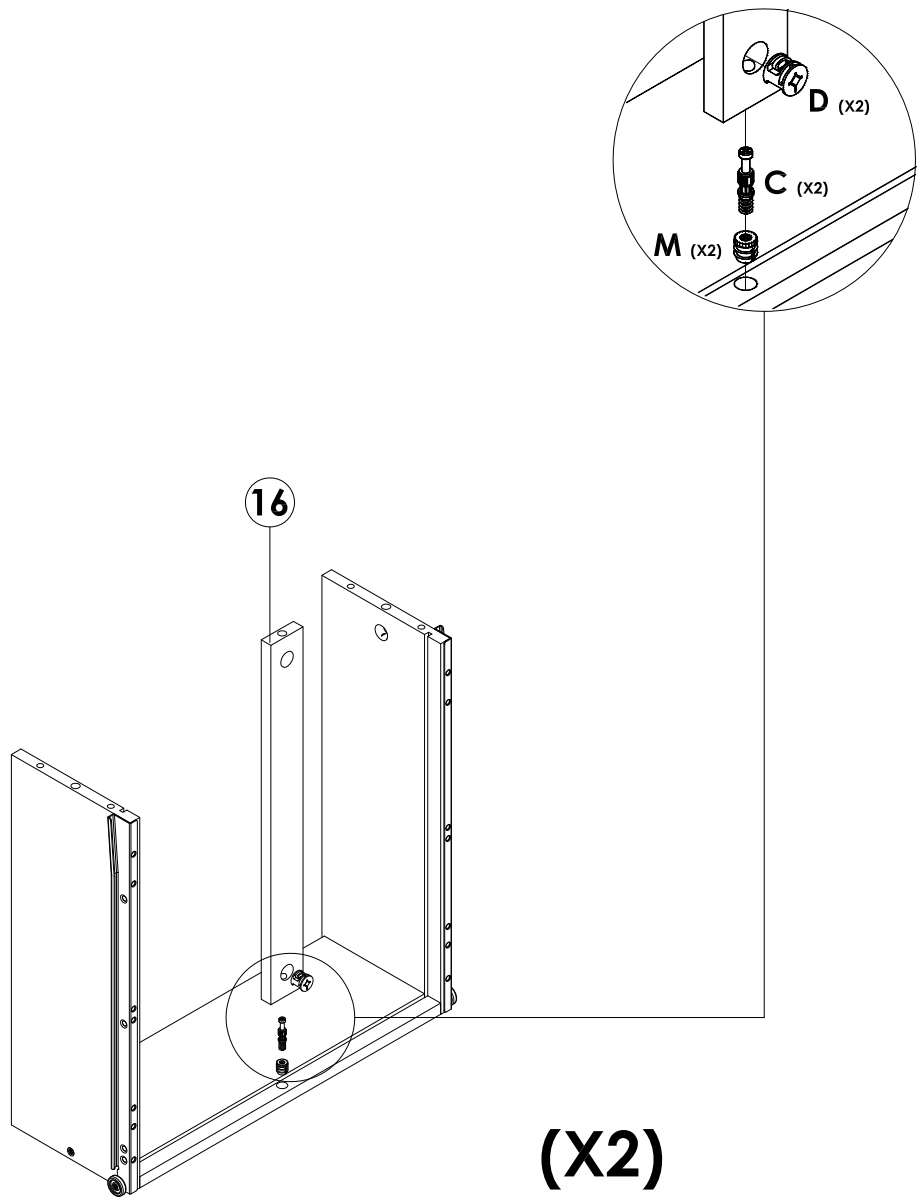

STEP 17




Attach **Drawer Base Support** onto **Drawer Rear** by using **(M),(C)** and **(D)**, tighten it up by using crosshead screw driver.

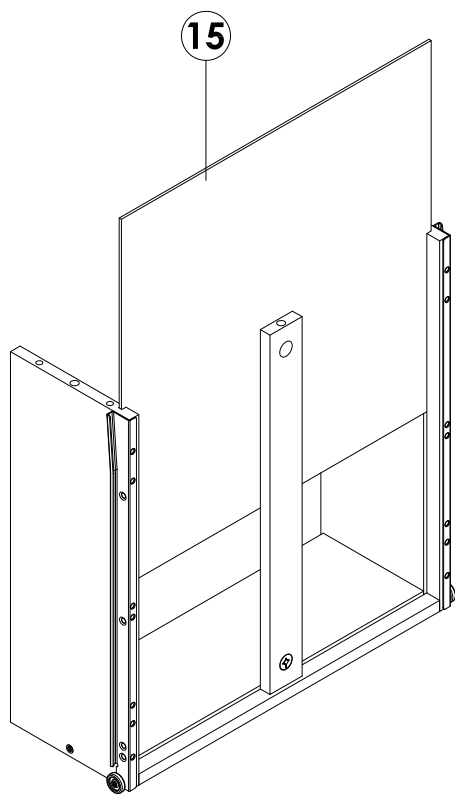

(X2)

STEP 18

Slot **Drawer Base** into **Drawer Side (L/R)**.

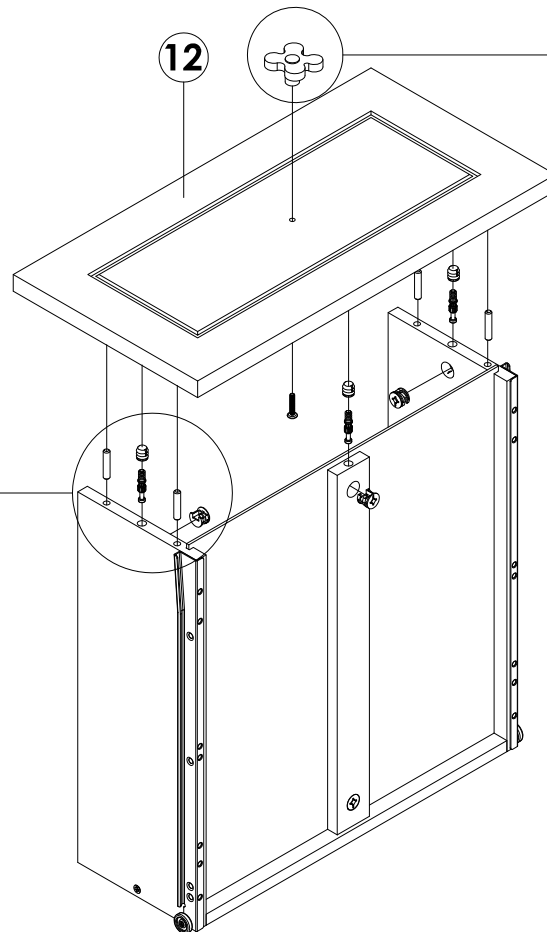


(X2)

STEP 19

Attach **Drawer Face** onto both **Drawer Side (L/R)** by using **(A)**, **(C)**, **(M)** and **(D)**.

Follow that up by attaching and securing **(V)** onto **Drawer Face** by screwing **(L)** in from behind, tighten it up by using crosshead screw driver.

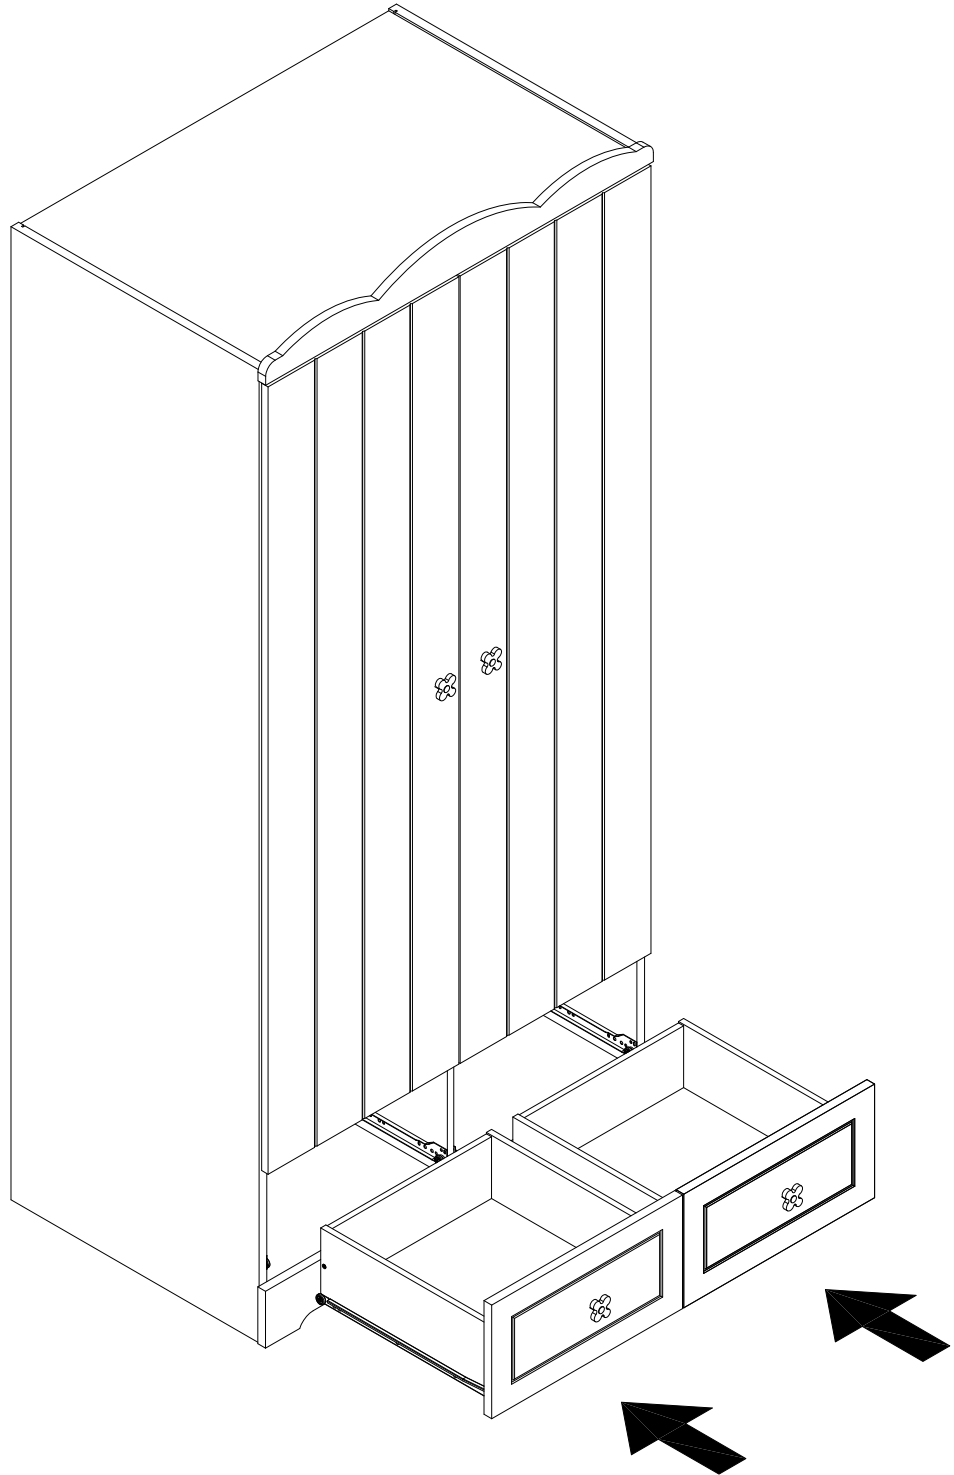

STEP 20

Insert **Drawers** into **Wardrobe Frame**.

Go on to complete the entire assembly.

WARNING

Injury may result from tipping furniture

This restraint is not a substitute for proper adult supervision.

This restraint may provide protection against tipping furniture.

Do not allow children to climb on furniture.

Failure to detach this restraint before moving furniture may result in injury and damage.

THIS BAG IS NOT A TOY

"WARNING - TO AVOID DANGER OF SUFFOCATION, KEEP THIS BAG AWAY FROM BABIES AND SMALL CHILDREN. DO NOT USE IN CRIBS, BEDS, CARRIAGES OR PLAY PENS. THIS BAG IS NOT A TOY."

KNOT BAG BEFORE THROWING AWAY.

ANTI TIPING KIT INSTALLATION INSTRUCTIONS

1. Attach the bracket to the back top rail of the furniture using the 18mm screw provided through the small hole.
2. Locate the other bracket on the wall 50mm below the bracket on the unit. Care should be taken to ensure that this is securely fastened to the wall. The best method of fixing will depend upon the construction of the wall. Please note we do not supply fittings for this purpose as the type of fixing required will vary depending upon your wall.
3. Place the furniture into position so both mounting brackets are vertically in line.
4. Lace the end of the restraint strap through the larger hole in each mounting bracket. Bring both ends together and slide the flat end through the locking end and draw it through until all slack is removed.
5. Confirm that the strap is securely laced and locked.

